
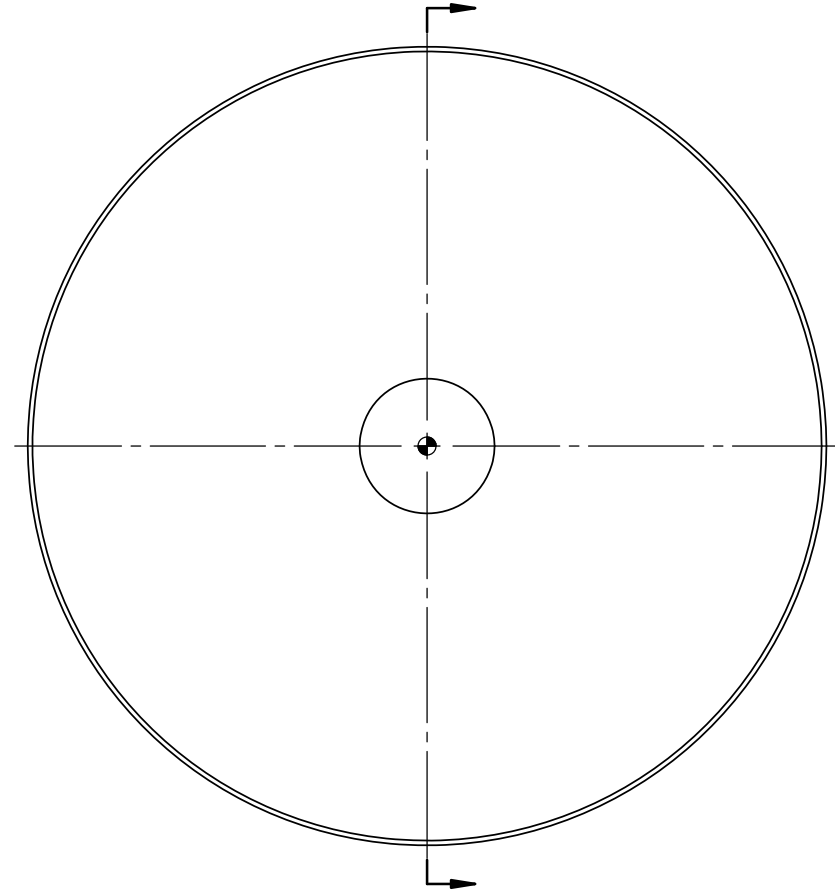


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
0	INITIAL SOLIDWORKS DRAWING RELEASE	05/11/12	JEH

NOTES: UNLESS OTHERWISE SPECIFIED

1. DEBURR SHARP EDGES .015 MAX.
2. CHAMFER ALL THREADS .01 PAST ROOT DIAMETER.

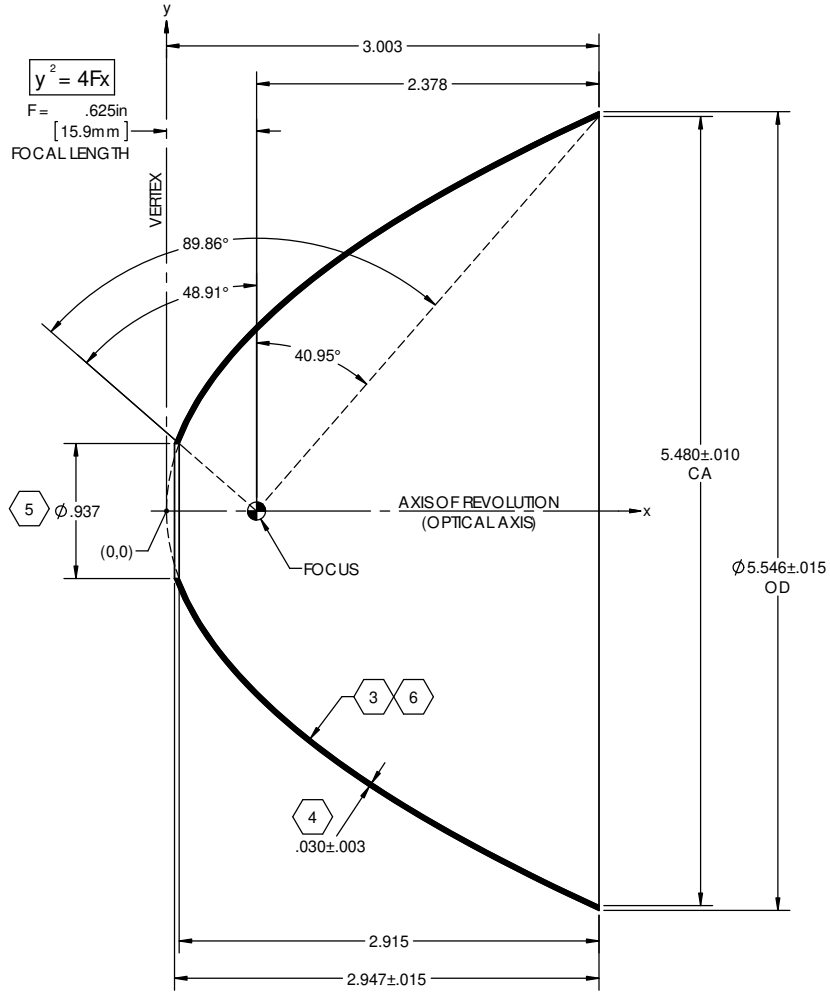

- 3 REFLECTOR TO BE REPLICATED FROM SPECIFIED MASTER TOOL EXHIBITING REQUIRED PARABOLIC GEOMETRY AND SPECULAR SURFACE FINISH OF 80-50 SCRATCH-DIG PER MIL-O-13830A.
- 4 NOMINAL THICKNESS (T) MAY VARY ±T/4 WITHIN .25 OF EDGES.
- 5 VERTEX HOLE OPENING IS THE PREFERRED REGISTRATION FEATURE FOR AXIAL ALIGNMENT OF REFLECTOR. PLANE OF CLEAR APERTURE NOT RECOMMENDED FOR THIS PURPOSE.
- 6 REFLECTIVE ENHANCEMENT SURFACE COATING TO BE SEPARATELY SPECIFIED.

CROSS REF: PB101
REFLECTIVE SURFACE AREA: 0.2901 SQ. FT.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES FRACTIONS DECIMALS ANGLES 1/16 1/32 .001 1/2°		CONTRACT NO.		42310 WINCHESTER RD. TEMECULA, CA 92590 WWW.OPTIFORMS.COM	
MATERIAL ELECTROFORMED NICKEL - LSN TYPE 1		APPROVALS DRAWN JEH DATE 05/11/12			
FINISH NOTES 3,6		CHECKED		REFLECTOR, PARABOLIC .625" / 16mm FL	
NEXT ASSY		ENGR KMT DATE 05/11/12		SIZE C	CAGE CODE 0Y1Y4
APPLICATION		DESIGN ACTIVITY		DWG. NO. P16-0100	REV 0
		-DO NOT SCALE DRAWING-		SCALE 1.5:1	CAD NO. P16
				SHEET 1 OF 1	